



DC PUMPS PANTHER DC

EN. Transfer pumps. Rotary, self priming, vane pumps featuring high flow rates, and easy operation and installation. The 24/12 version can be used with both voltages.

Technical features:
Vane pump with rotor. Mechanical seal. Incorporated by-pass valve. Connector block with ON/OFF switch. 100 µ filter incorporated in the pump body, easy access for maintenance. Threaded 1" connectors.

ES. Bombas de trasiego Bombas de tipo rotativo de paletas, autocebantes, caracterizadas por su elevado caudal, así como por su fácil funcionamiento e instalación. La versión 24/12 puede ser utilizada con ambas tensiones.

Características técnicas:
Bomba de paletas con rotor. Cierre mecánico. Válvula de by-pass incorporada. Caja de derivación con interruptor de encendido/apagado. Filtro de 100 µ incorporado en el cuerpo de la bomba, de fácil acceso para el mantenimiento. Conexiones embridadas de 1".

PT. Bombas para transferência. De tipo rotativo com palhetas, auto-escovante, caracterizadas por alta capacidade e facilidade de funcionamento e instalação. A versão 24/12 pode ser utilizada com qualquer destas tensões.

Características técnicas:
Bomba de palhetas com rotor. Vedação mecânica. Válvula by-pass incorporada. Caixa de derivação com interruptor on/off. Filtro de 100 µ incorporado no corpo da bomba, de acesso fácil para manutenção. Encaixes de rosca de 1".


PERFORMANCE

- Flow rate up to 70 l/min
- 12/24 V operation
- Duty cycle 30 min.

- Caudal hasta 70 l/min
- Funcionamiento 12/24 V
- Ciclo de funcionamiento 30 min.

- Caudal até 70 l/min
- Funcionamento 12/24 V
- Ciclo de trabalho 30 min.

DIMENSIONS

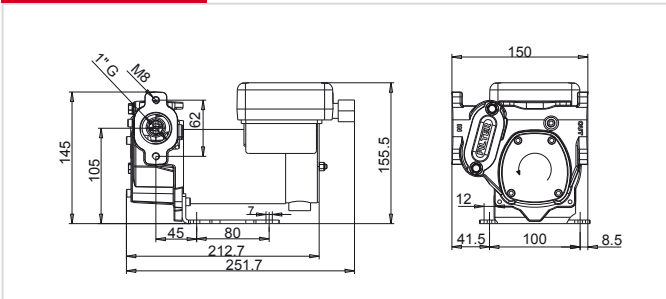

GUARANTEE



Guaranteed IP55 protection
Prevents water and dust entering the motor.

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F0034000B	7,5	16,5	345x175x255	13,6x6,9x10	1
F0034100C	7,5	16,5	345x175x255	13,6x6,9x10	1





Flow-rate

up to
70 l/min
(up to 18,5 gpm)



Panther DC

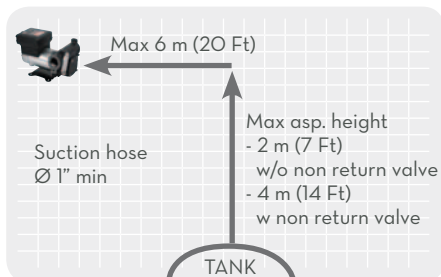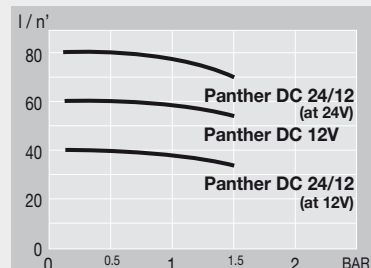

FEATURES

On/Off switch included



1" BSP threaded included



Filter included



Flanged connect. (optional)



Kit Carry (optional)



PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		Voltage		Duty cycle min.	rpm	Inlet BSP	
			l/min	gpm	DC Volt	Power Watt				
F0034000B	Panther DC 12V	D	56	14,8	12	420	35	30	2900	1"
F0034100C	Panther DC 24/12V	D	70/35	18,5/9,2	24/12	600/200	25/16	30	3500/1800	1"
R10011000	Kit cable 2 m (12 V) - Fuse on the cable									
R10040000	Kit cable 2 m (24 V) - Fuse on the cable									
R10041000	Kit cable 4 m (12 V) - Fuse on the cable									
R10039000	Kit cable 4 m (24 V) - Fuse on the cable									
R13242000	Kit handle									